



How to configure 4.3 inch indoor stations custom buttons

Preparation

1. DS-KH6110-WE1
2. IVMS 3.9.3.3 or higher version



Step 1: Local menu configuration

Go to Settings – Preference – DIY Button. Check picture below for reference:

Preference		DIY Button	
Shortcut Settings	>		Call Management Center >
DIY Button	>		Call Elevator >
			Call Indoor Station >
			Call Indoor Station >

Title:	How to configure 4.3 inch indoor stations custom buttons	Version:	v1.0	Date:	28/03/2024
Product:	Video intercom	Page:	2 of 3	HIKVISION	



Configuration options:

Button 1: preview (IP camera / outdoor / confirm (doorphone)), call (management center / indoor station / indoor extension) , call elevator

Button 2: preview (IP camera / outdoor / confirm (doorphone)), call (management center / indoor station / indoor extension) , call elevator, open lock (1 / 2)

Button 3: preview (IP camera / outdoor / confirm (doorphone)), call (management center / indoor station / indoor extension) , call elevator


Button 4: preview (IP camera / outdoor / confirm (doorphone)), call (management center / indoor station / indoor extension) , call elevator

Step 2: IVMS configuration

Add an indoor station in IVMS

Open Remote Configuration Tab


Go to Intercom – Custom Button. Check picture below for reference call management center/master station:

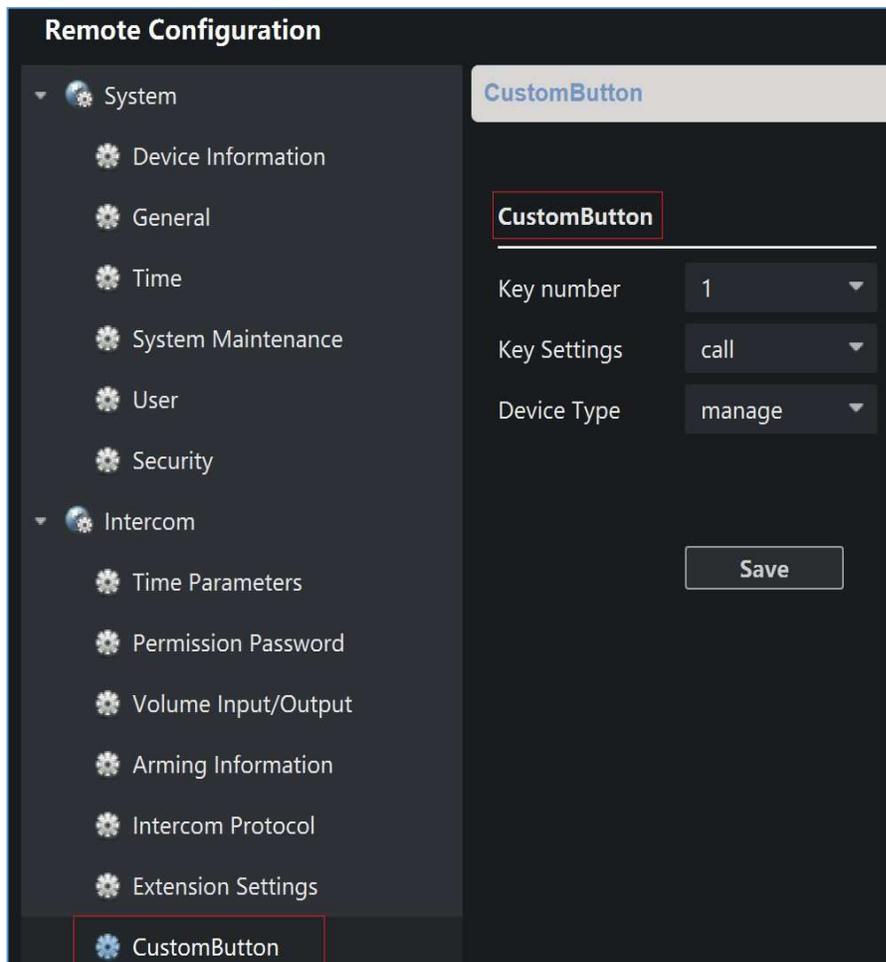

Title:	How to configure 4.3 inch indoor stations custom buttons	Version:	v1.0	Date:	28/03/2024
Product:	Video intercom	Page:	3 of 3	HIKVISION	



Check picture below for reference preview outdoor camera:

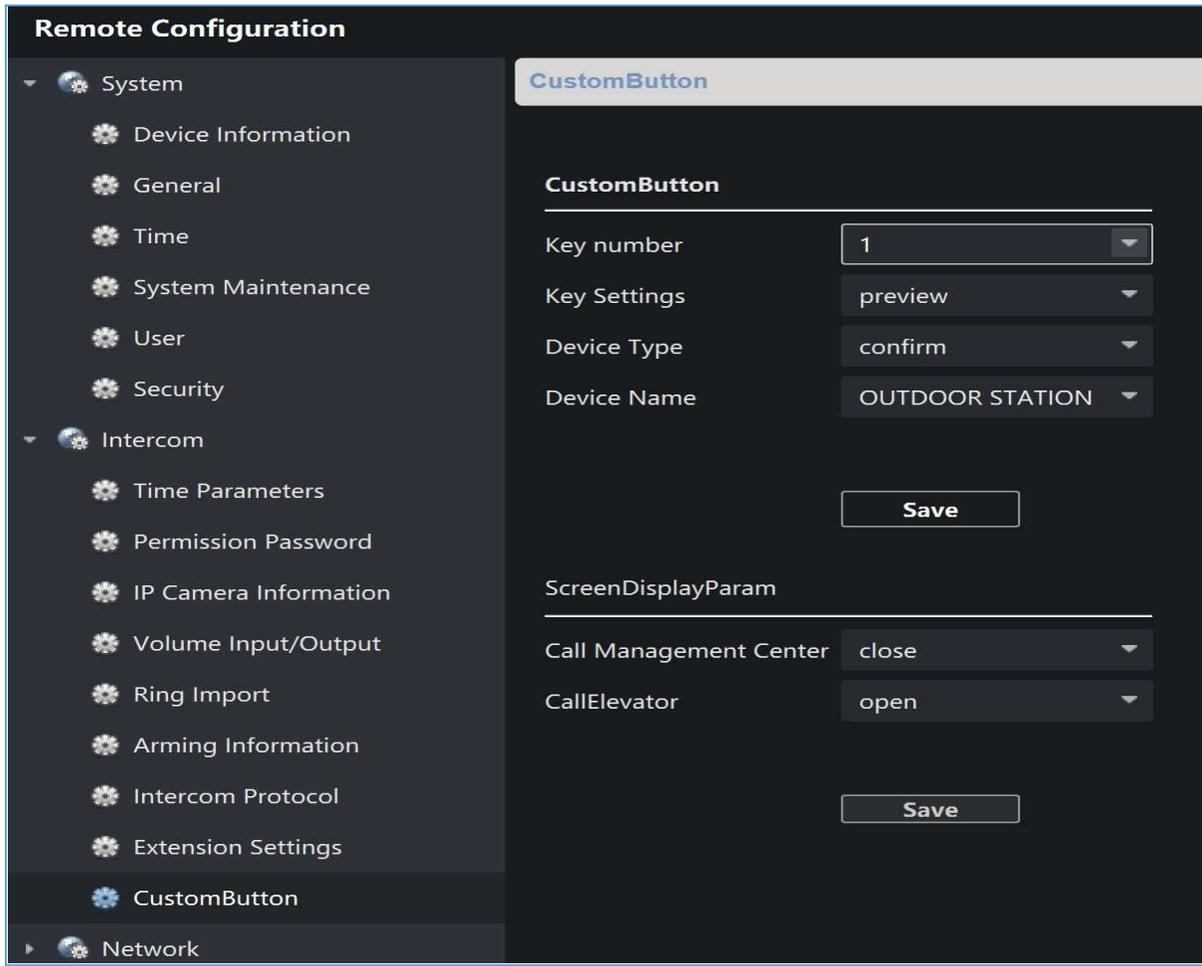

Note:
The only option for KH6100 and KH6000 for custom button configuration is via IVMS.



See Far, Go Further